


BASE

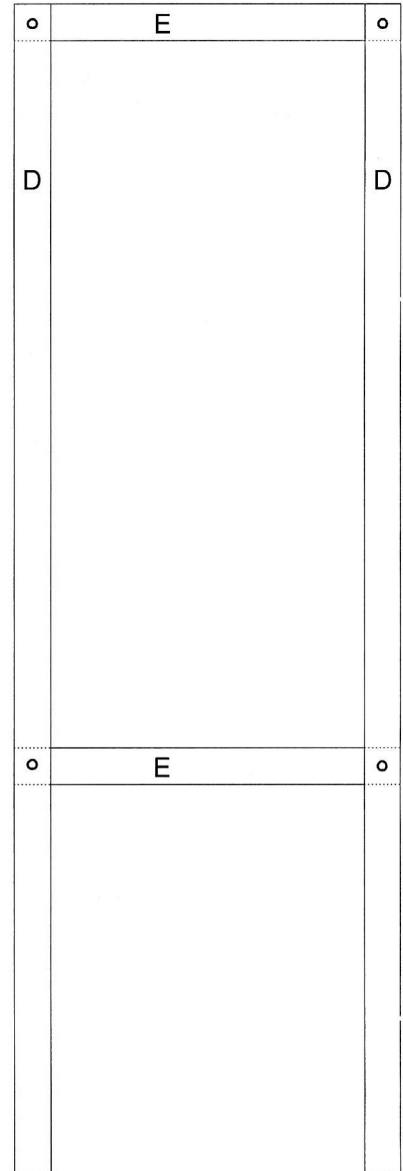

TARGET FRAME

Materials List

Sections A are 2x4x25

Sections B are 2x6x12

Sections C are 2x6x32

Sections D are 1x3x72

Sections E are 1x3x24

4 - 3-1/2" x 1/4" carriage bolts with wingnuts

4 - 2" x 3/16" carriage bolts with wingnuts

Using a piece of 1x3 as a spacer between A sections, glue and fasten both A sections flush to the top of the two B sections. This is the base. Clamp the C sections to the base and drill holes as indicated so that 3-1/2 inch carriage bolts with wing nuts can be used to attach the additional supports for outdoor windy conditions.

Clamp and drill sections D and E using 2 inch carriage bolts and wing nuts in the four indicated positions. Section E should be secured to the rear of section D approximately 4' apart to accommodate a 2' x4' piece of backer cardboard.

It is advisable to use 4 "binder clips" (2 per side) to secure the cardboard to the frame to avoid staple injuries during use. Targets may then be stapled or "clipped" to the backer cardboard.

USE:

The base can be used to hold a single frame centered between the B sections, or it can also hold two target frames by inserting just one frame leg inside the support letting the other frame leg rest unsupported on the ground.

AS ALWAYS - WHEN USING TARGET FRAMES, BE SURE THAT YOUR ROUNDS WILL IMPACT INTO THE BACKSTOP. BULLETS DON'T STOP AT THE TARGET!

1 base & 2 frames - not to scale

